


SRT FOOTLOOP

It adjusts easily and works with all of the ascenders on the market.
You can adapt it to your material and your height for SRT without a second thought.



ASCENSION SRT

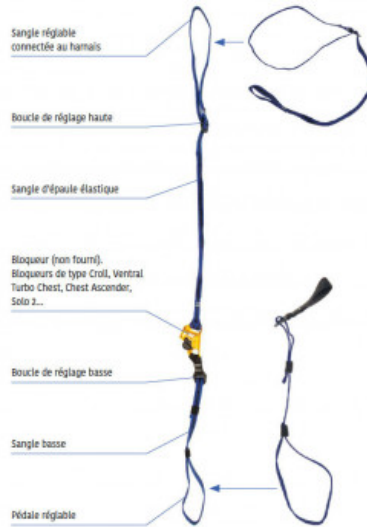

DESCRIPTION

The SRT FOOTLOOP includes two straps:

- the upper strap, partly elastic, is equipped with a metal buckle system to adjust in length,
- the lower strap, also is equipped with a metal buckle system to adjust its length and that of the foot loop.

The upper strap is knotted to the knee ascender (not included) with a girth hitch - on the side of the smaller loop, is passed over the shoulder and clipped to the back of the harness with a carabiner (not included), then adjusted.

The lower strap is knotted to the knee ascender with a girth hitch - on the side of the black loop. Depending on whether it is tied directly around the shoe or attached to it with a carabiner (not included), the foot loop is adjusted with the metal buckle and elastics, then fixed to the foot.

TECHNICAL INFORMATION

Upper strap length	adjustable from 1 to 1.30 m (3.2 to 4.2 ft)
Lower strap length	adjustable from 35 to 60 cm (13.8 to 23.6 in)
Weight	135 g (4.7 oz)

REFERENCE

FTC/SRT-P SRT Footloop

DOCUMENT

Instructions

