


# HOLLOW BRAID MOOREX

Hollow braid for dynamic bracing.



## BRACING ROPE

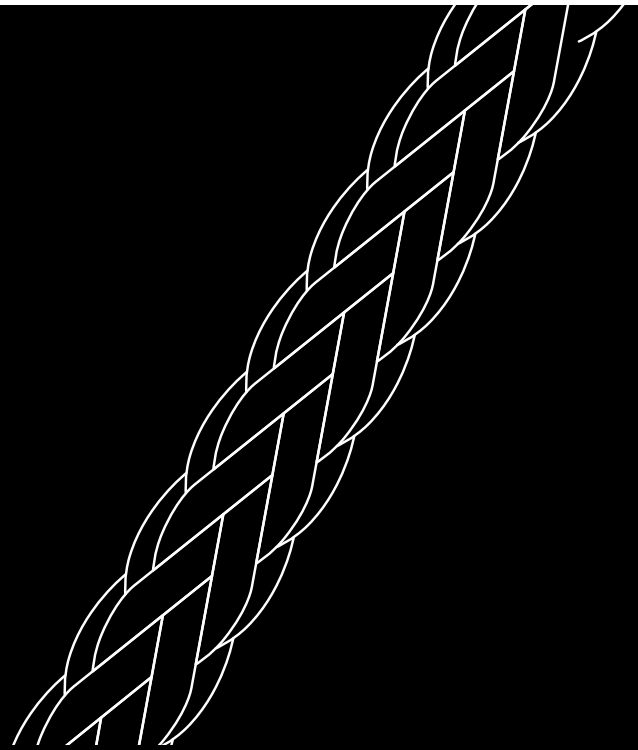

## DESCRIPTION

Flexible rope used for bracing. For strengthening, support, etc., this is a braid very easy to splice.

Three diameters available: 10 mm, 14 mm, and 20 mm.

It is used with a protective sleeve for the trunk (tube-shaped strap).

## TECHNICAL INFORMATION

Material	20-strand hollow braid, 100 % polyester, black
Elongation	25 % at 30 % of MBS
MBS 10 mm	25 kN
MBS 14 mm	40 kN
MBS 20 mm	72 kN
Weight	10 mm : 67 g/m   14 mm : 123 g/m   20 mm : 296 g/m

## REFERENCES

FTC/MO-10 diameter - 10 mm (0.39 in)

FTC/MO-14 diameter - 14 mm (0.55 in)

FTC/MO-20 diameter - 20 mm (0.78 in)

## DOCUMENT

Instructions

