


STABLE BRAID

The **STABLE BRAID** is a polyester double braid designed for felling works and load rigging. Its construction with low elongation offers a precise load control, the Samthane® coating gives a great resistance to abrasion and an exceptional durability.

RIGGING ROPE

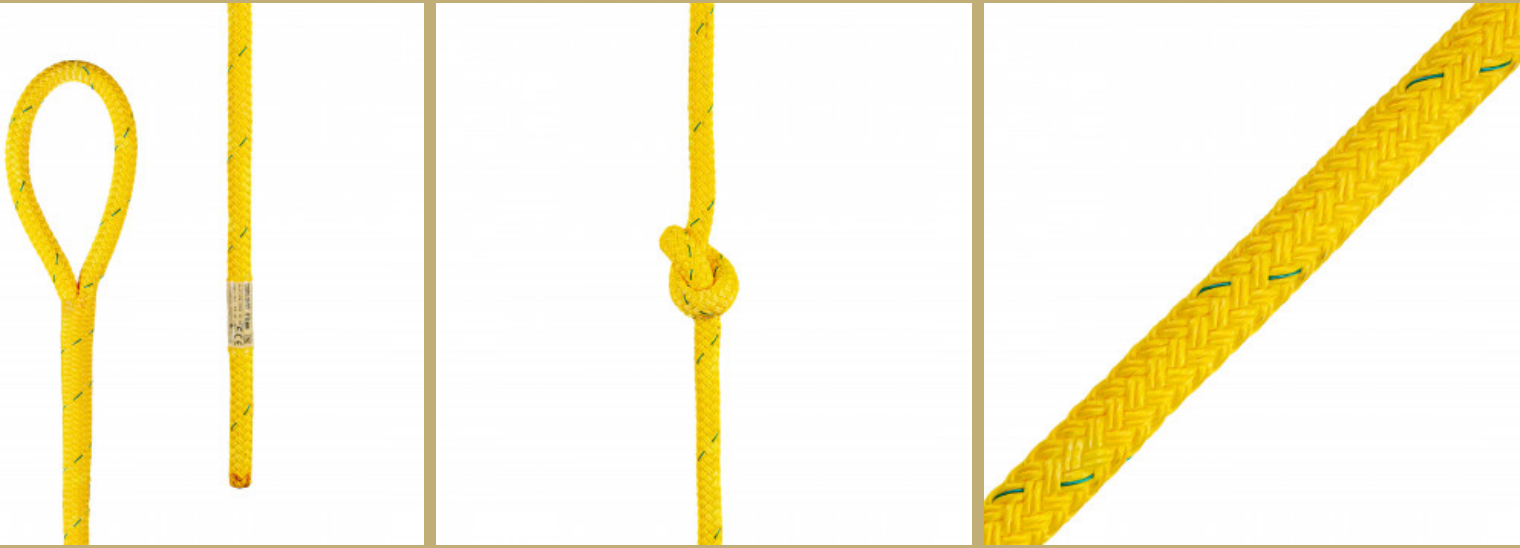

DESCRIPTION

The **STABLE BRAID**, spliced by **FTC TREE**: a classic among the rigging ropes, spliced by us. The rope has been famous throughout the world for years. Developed by Samson Rope Technology and manufactured to the highest standards, the 100% polyester double braid is of high stability and great robustness.

The construction with low elongation ensures a precise control of suspended loads, both for vertical and lateral movements. Both cover and core are in polyester, with a great resistance to abrasion and UV. As for the Samthane®-coating, it limits water absorption and extends the rope's lifespan, even in damp conditions or under abrasion.

The rope is easy to manipulate, as it holds its shape, doesn't flatten much, and offers a high splice performance. Whether for rigging, redirects or load lifting, the **STABLE BRAID** is a safe bet for arborists looking for reliability and consistency on their work places.

Our range of spliced ropes is the result of that collab: 12 mm and 14 mm diameters, in our usual standard lengths of 50 m (164 ft), 65 m (213 ft) and 70 m (229 ft). As always, other lengths can be spliced for special orders. Feel free to ask!

TECHNICAL INFORMATION

	STABLE BRAID 12	STABLE BRAID 14
Standard	Machinery Directive 2006/42/EC	
Material	100% polyester, Samthane®-coating	
Diameter	12 mm	14 mm
Construction	Double braid - 16 strands	
Material	50% cover/50% core	
Colour	Yellow	Orang
Elongation	Low (~1-3%), optimal for rigging works	
Weight	6.9 kg (50 m) 8.8 kg (65 m) 9.4 kg (70 m)	9.2 kg (50 m) 11.8 kg (65 m) 12.6 kg (70 m)
Unspliced rope MBS	47 kN	60 kN
Spliced rope MBS	46 kN	55 kN
WLL	6.5 kN	7.8 kN

REFERENCES

- FTC/SB14-50 length (m/ft) - 50 m (164 ft)splice - 1 splicediameter - 14 mm (0.55 in)
- FTC/SB14-65 length (m/ft) - 65 msplice - 1 splicediameter - 14 mm (0.55 in)
- FTC/SB14-70 length (m/ft) - 70 m (229.6 ft)splice - 1 splicediameter - 14 mm (0.55 in)
- FTC/SB12-50 length (m/ft) - 65 msplice - 1 splicediameter - 12 mm (0.47 in)
- FTC/SB12-65 length (m/ft) - 50 m (164 ft)splice - 1 splicediameter - 12 mm (0.47 in)
- FTC/SB12-70 length (m/ft) - 70 m (229.6 ft)splice - 1 splicediameter - 12 mm (0.47 in)

DOCUMENT

Instructions

