



RIGGING

# MINI-ÉCLIPSE

RIGGING BLOCK

THE MINI-SPECIALIST FOR RIGGING



[www.ftc-tree.com](http://www.ftc-tree.com)







A LIGHT BLOCK DEVELOPED FOR RIGGING WORKS.

## TECHNICAL DATA

- Aluminium sheave and cheek plates.
- Minimum Breaking Strength (MBS): 100 kN / WLL: 20 kN  
Safety coefficient 5.
- For ropes  $\varnothing$  16 mm maximum.
- Steel linch pin for safety (with attachment string).
- Weight: 650 g (1.4 lb).

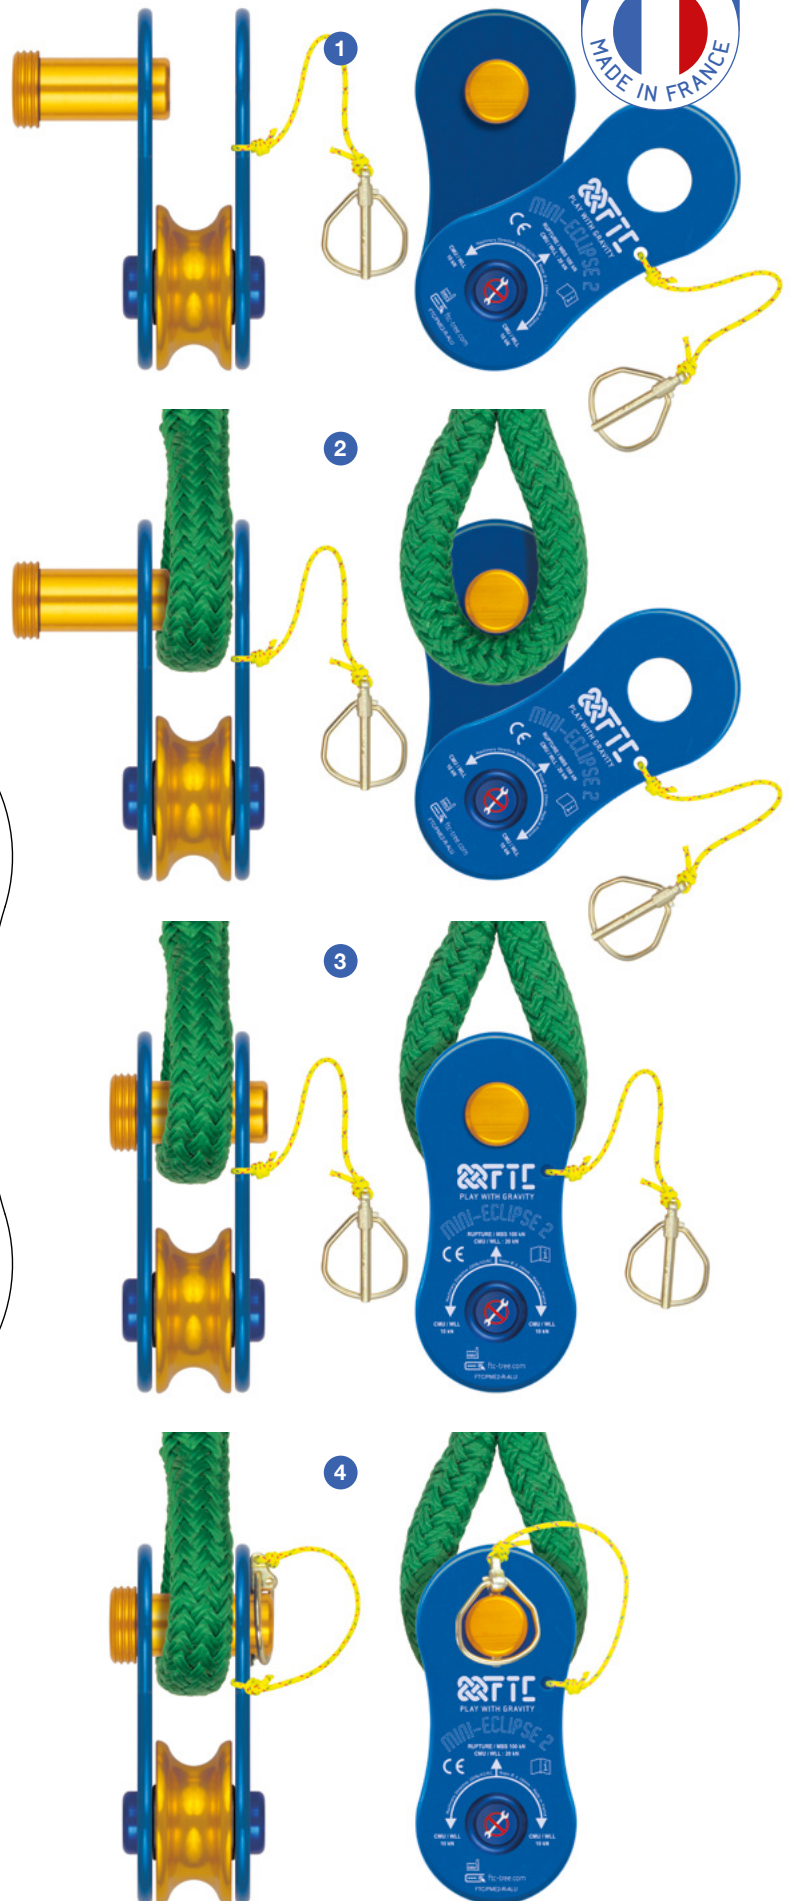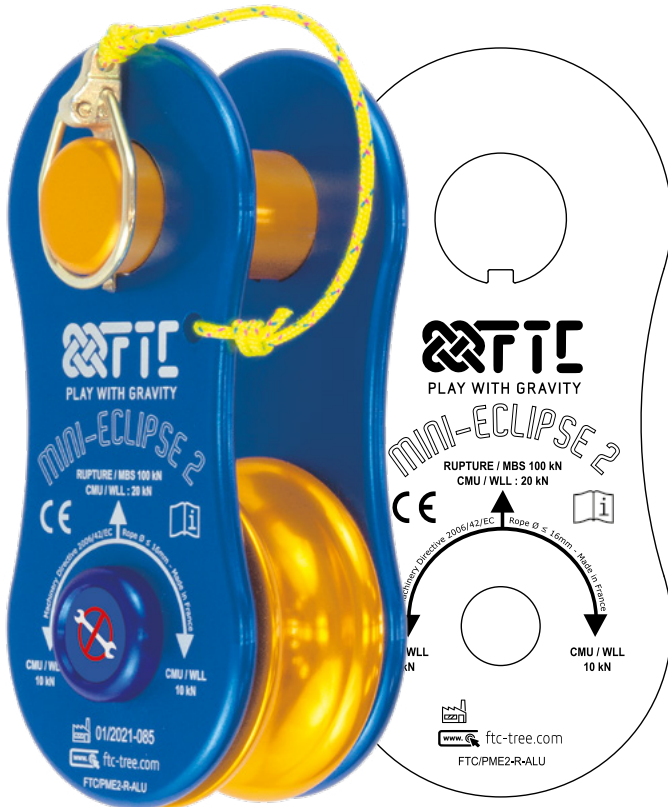

## PERFORMANCES

It is one of the lightest and most compact blocks, still it has a 20 kN WLL (100 kN MBS). Its rotating cheek plates and removable upper axle make it easy to open and close. The axle is locked with a safety linch pin that is attached to one of the cheek plates with a string and cannot be lost.

The sheave takes ropes up to 16 mm diameter. It is larger than the cheek plates, so that they don't rub and damage it in case of incorrect use. Caution: the MINI-ÉCLIPSE cannot be used with metal cables, still it can be used for redirect, with an ANACONDA sling for instance.